


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 10 TOWNSHIP 14 RANGE 3
DATE: 12-3-02 2-28-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison FD
METHOD OF ESTABLISHMENT: County 1-8-2000

IN. S.P.C. E ZONE NAD '83
NAME: 14031004
N: 491114.4616(m)
E: 54536.8919(m)

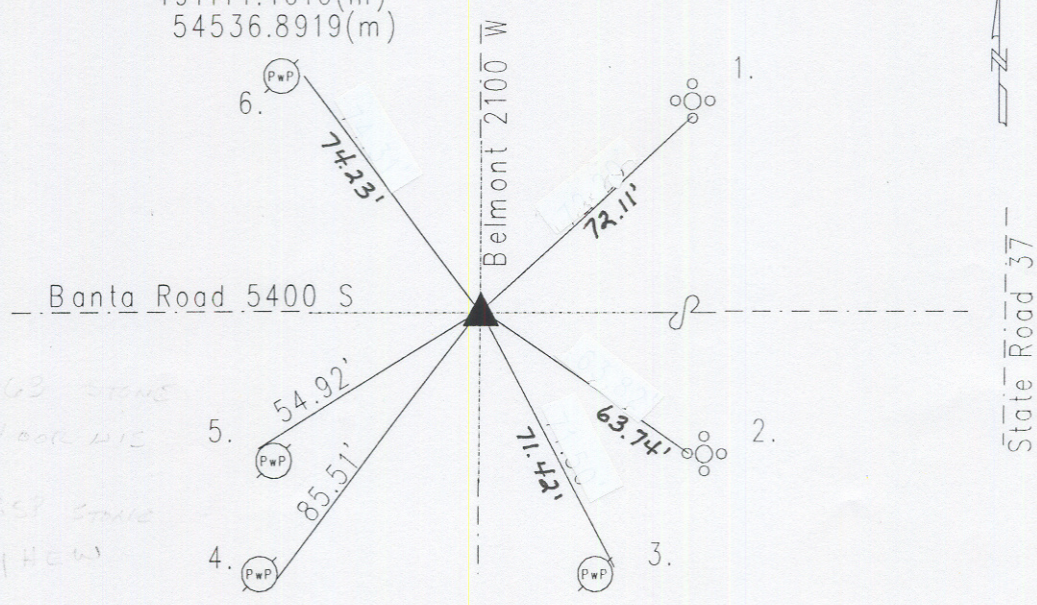

CORNER HISTORY: Marion County Atlas dated 1883 called corner witness: 20" white oak N78E 9 links; 10" sugar S33W 25 links per page 5. Reference dated 2-5-1863 stone by O. W. Voorhis. Reference dated 4-21-1857 stone by R. Mayhew. Reference dated 7-13-1946 stone 6" down. Reference dated 10-4-60 added tie information 10-4-60 by Monroe. Reference dated 5-3-72 McLand called brass plug. Reference dated 12-3-2002 Reith Riley set Harrison w/MCSO on site: where the brass plug in a steel box was. Setting was done per State Highway Job. No other points were found. Reference dated 2-28-07 by Wilcoxon called found Harrison and checked update on ties.

14031004

REF.	DISTANCE	DESCRIPTION
1.	72.11'	Cut 'x' S-bolt of aluminum pole base
2.	63.74'	Cut 'x' W-bolt of aluminum pole base
3.	71.42'	Mag nail w/brass washer E PwP#23-752 12"up
4.	85.51'	PK nail E PwP#50-751 8"up
5.	54.92'	Mag nail w/brass washer NW PwP#611-751 10"up
6.	74.23'	Mag nail w/brass washer E PwP#32-721 12"up